


Network Video Recorder

NVR302-S-P Series

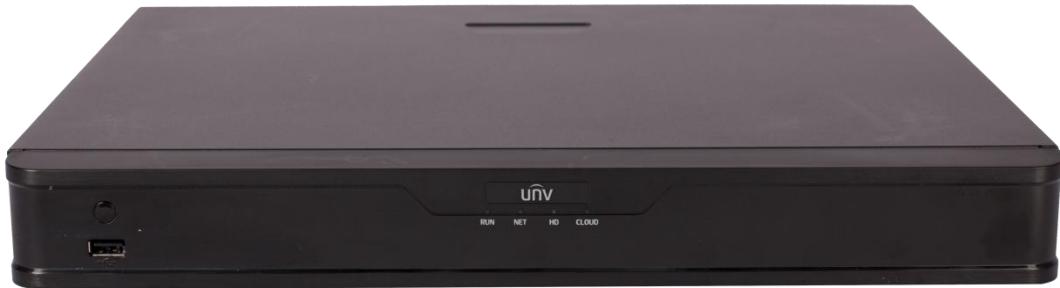

Key Features


- Support Ultra265/H.265/H.264 video formats
- 8/16-channel input
- Plug & Play with 8/16 independent PoE network interfaces
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support HDMI and VGA simultaneous output
- Up to 8 Megapixels resolution recording
- 2 SATA HDDs, up to 10TB for each HDD
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade

Specifications

Model	NVR302-08S-P8	NVR302-16S-P8	NVR302-16S-P16
Video/Audio Input			
IP Video Input	8-ch	16-ch	16-ch
Two-way Audio Input	1-ch, RCA		
Network			
Incoming Bandwidth	160Mbps		
Outgoing Bandwidth	96Mbps	96Mbps	96Mbps
Remote Users	128		
Protocols	P2P, UPnP, NTP, DHCP, PPPoE		
Video/Audio Output			
HDMI/VGA Output	VGA: 1024X768@60, 1280X720@60, 1280X1024@60, 1920X1080@50, 1920X1080@60 HDMI: 4k (3840x2160@30), 4k (3840x2160@60), 1024X768@60, 1280X720@60, 1280X1024@60, 1920X1080@50, 1920X1080@60		
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
Audio Output	1-ch, RCA		
Synchronous Playback	8-ch	16-ch	16-ch
Corridor Mode Screen	3/4/5/7/9	3/4/5/7/9/10/12/16	3/4/5/7/9/10/12/16
Decoding			
Decoding format	Ultra265/H.265/H.264		
Live view/Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF		
Capability	1 x 4K@30, 2 x 4MP@30, 3 x 3MP@25, 4 x 1080P@30, 8 x 720P@30	1 x 4K@30, 2 x 4MP@30, 3 x 3MP@25, 4 x 1080P@30, 8 x 720P@30, 16 x D1	1 x 4K@30, 2 x 4MP@30, 3 x 3MP@25, 4 x 1080P@30, 8 x 720P@30, 16 x D1
Hard Disk			
SATA	2 SATA interfaces		
Capacity	up to 10TB for each disk		
External Interface			
Network Interface	1 RJ-45 10M/100M/1000M self-adaptive Ethernet Interface		
USB Interface	Front panel: 1 x USB2.0, Rear panel: 1 x USB2.0		
Alarm In	4-ch		
Alarm Out	1-ch		
PoE			
Interface	8 RJ-45 10M/100M self-adaptive Ethernet Interface		16 RJ-45 10M/100M self-adaptive Ethernet Interface
Max Power	Max 30W for single port Max 130W in total	Max 30W for single port Max 130W in total	Max 30W for single port Max 240W in total
Supported Standard	IEEE 802.3af/at		
General			
Power Supply	220V AC Power Consumption: ≤9 W (without HDD)		
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)		
Dimensions (W×D×H)	380mm ×315mm × 53mm (15.0" × 12.4" ×2.1")		


Weight (without HDD)	≤2.4kg (5.29lb)
----------------------	-----------------

Dimensions

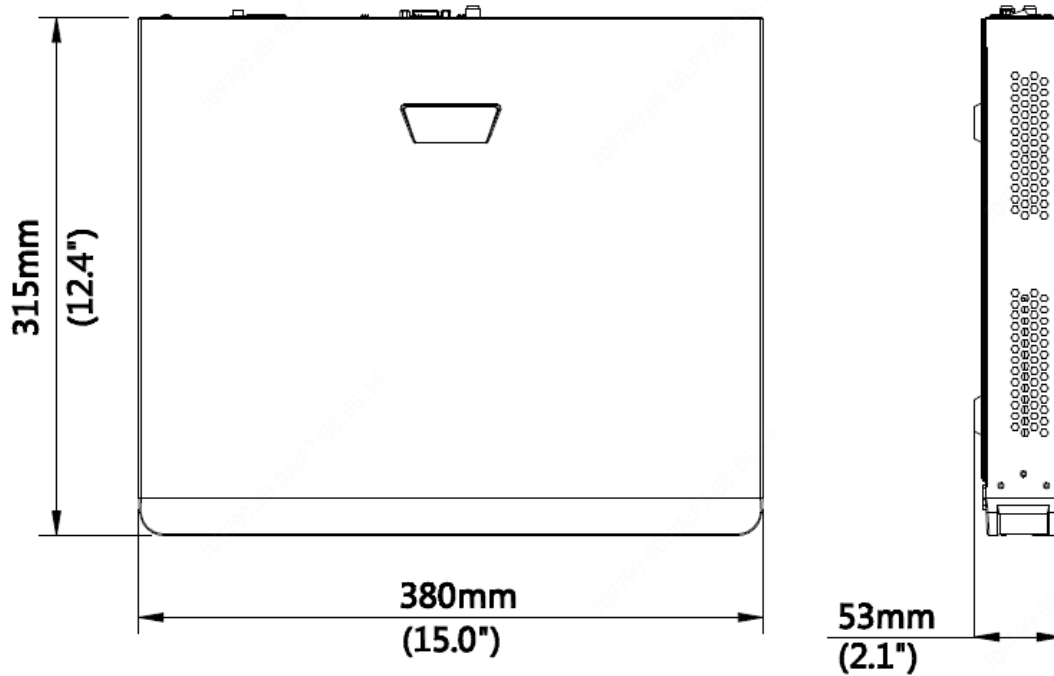

Rear Panel

Take **NVR302-16S-P8** for example

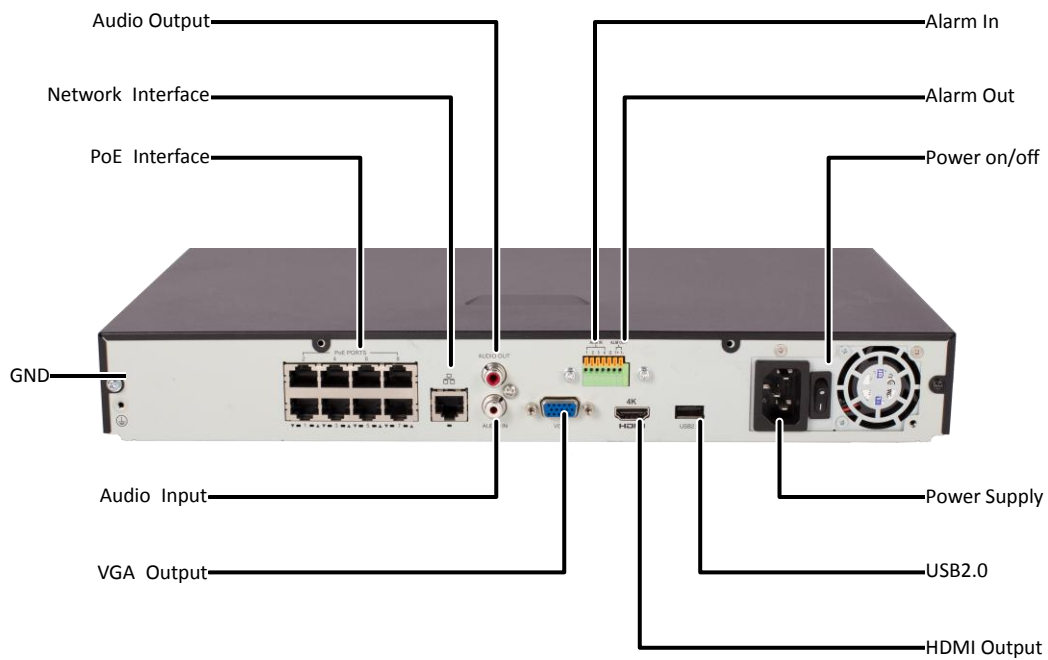



Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://sgcdn.uniview.com>

©2019 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.